

SPLITMUX® Series

SPLITMUX-HD-2LC

HDMI 2x1 Dual Screen Splitter/Multi-Viewer Installation and Operation Manual



Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

I. Introduction

This product is a high performance 2 by 1 Multi-Viewer. It supports two High definition input source display on one screen. As a Multi-Viewer, it can display on one screen in 4 modes.

II. Features

1. Compliant with HDMI 1.3a ;
2. Supports multiplexed HDMI 2-input and 1-output and 4 display modes ;
3. Supports up to 1080p High De finition resolution ;

4. Support scaler up, scaler down function ;
5. Support multi output resolution ;
6. Support digital audio format LPCM/AC3/DTS

III. Package

1. HDMI 2x1 Multi-Viewer ----- 1PCS
2. 5V1A DC Power adapter ----- 1PCS
3. Operation Manual ----- 1PCS

IV. Specifications

1. Video Bandwidth 225MHz[6.75Gbps]
2. Input Ports 2 × HDMI (Female type)
3. Output Ports 1 × HDMI (Female type),
4. Audio output STEREO WITH PCM2
5. Input Resolution 480i60Hz,480p60Hz,576i50Hz,576p50Hz,720p50/60Hz,

1080i50/60Hz,1080p24/30/50/60Hz,800x600@60,


1024x768@60,1280x720@60,1920x1080@60;

- | | | |
|-----|-----------------------|--|
| 6. | Output Resolution | 1080p,1080i,720p,1024x768,1360x768 |
| 7. | ESD Protection | Human Body model: ± 8 kV (air-gap discharge) ± 4 kV (contact discharge) |
| 8. | Power Supply | 5V/1A DC (US/EU standards, CE/FCC/UL certified) |
| 9. | Dimensions | 70 mm (W) \times 140mm (D) \times 25 mm (H) |
| 10. | Weight | 300 g |
| 11. | Chassis Material | Metal |
| 12. | Silkscreen Color | Black |
| 13. | Operating Temperature | 0 °C~40 °C/ 32 °F~104 °F |
| 14. | Storage Temperature | 20 °C ~ 60 °C/ 4 °F ~140 °F |
| 15. | Relative Humidity | 20~90 % RH (non-condensing) |

16. Power Consumption (Max) 10W

V. Operation controls and Functions

Front Panel

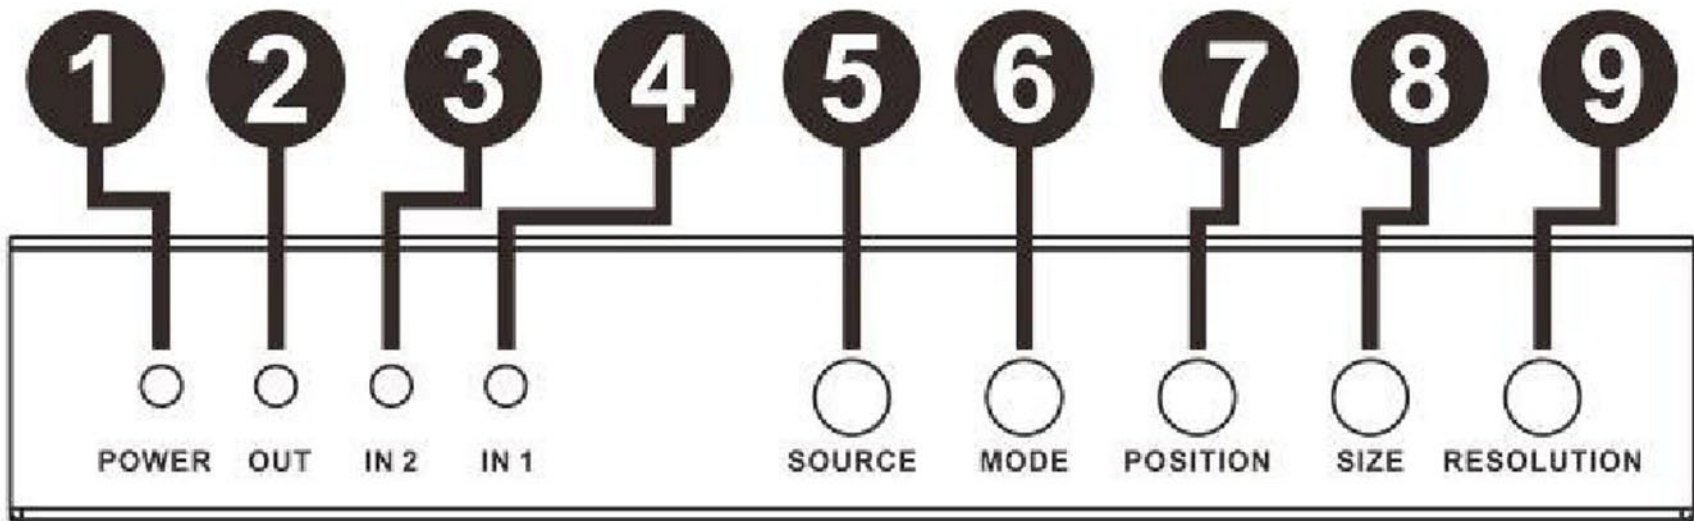

1. **POWER LED:** This red LED illuminates when the device is connected with power supply.
2. **OUTPUT LED:** This red LED illuminates when the TV plug in corresponding HDMI output


Port.

3. **IN2 LED:** This red LED illuminates when the HDMI IN2 is selected as main image.
4. **IN1 LED:** This red LED illuminates when the HDMI IN1 is selected as main image.
5. **SOURCE:** Press the button to select the input source as main image, and the LED will indicate the corresponding input source.
6. **MODE:** Press the button to select display mode. **See the description 1.**
7. **POSITION:** Press the button to select the position of sub image when in PIP mode.
8. **SIZE:** Press the button to select the size of sub image when in PIP mode.
9. **RESOLUTION:** Press the button to select the output resolution.

| NO. | RESOLUTION |
|-----|-------------------------|
| 1 | 1080P, Main image audio |
| 2 | 1080I, Main image audio |

| | |
|---|----------------------------|
| 3 | 720P, Main image audio |
| 4 | 1024x768, Main image audio |
| 5 | 1360x768, Main image audio |

Rear Panel

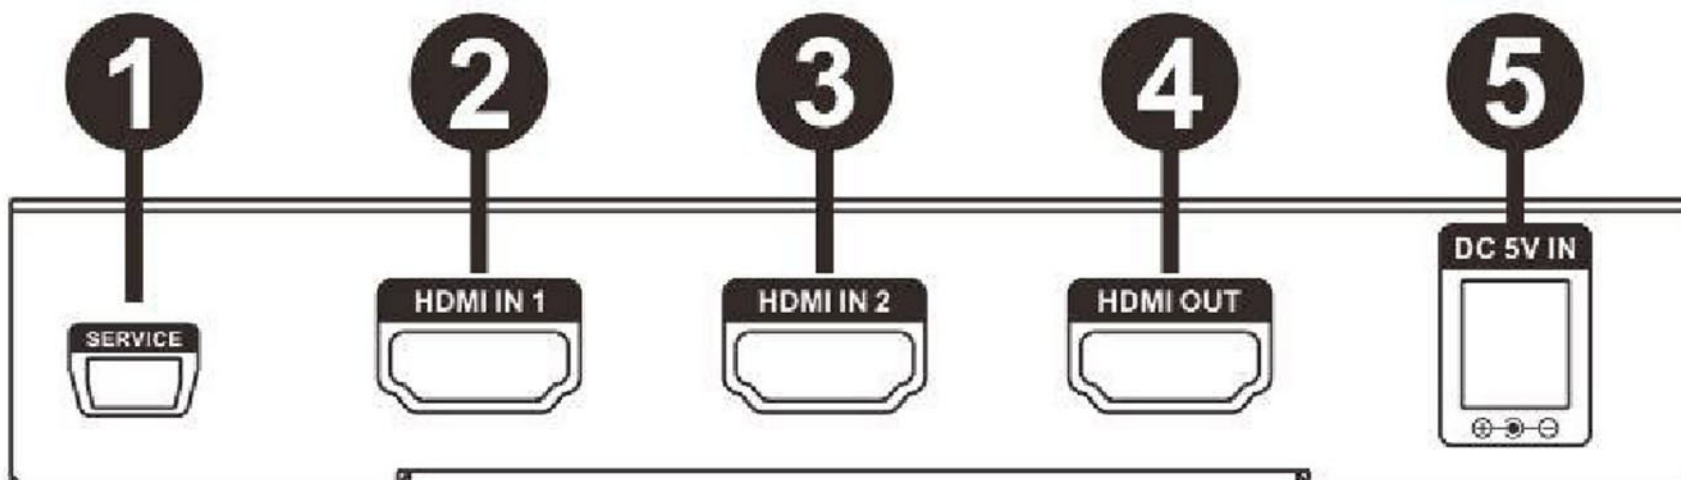

1. **SERVICE:** This port is for factory use only.
2. **HDMI IN1:** This slot is where you connect the HDMI source output from DVD, PS3.
3. **HDMI IN2:** This slot is where you connect the HDMI source output from DVD, PS3.
4. **HDMI OUTPUT:** This slots is where you connect the HDTV or monitor with HDMI cable.
5. **DC 5V IN:** Plug the 5V DC power supply into the unit and connect the adapter to AC wall outlet.

Description 1 Mode Introduction:

1. **Mode 1: One-view mode**
2. **Mode 2: PIP mode**
3. **Mode3: POP mode A**
4. **Mode 4: POP mode B**

Mode 1





Mode 2



Mode 3



Mode 4

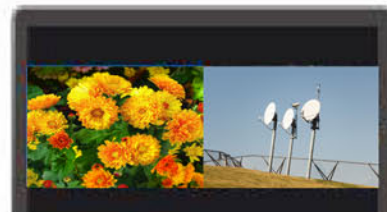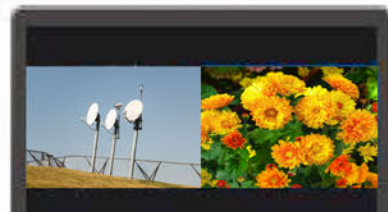

VI. Application Example

